


REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL

**REQUESTS FOR CUSTOM DIMENSIONS AND MATERIALS ARE ALWAYS WELCOME**



DRILL AND C'SINK  
FOR 1/4" FLAT HEAD M.S.  
(Typ 4)

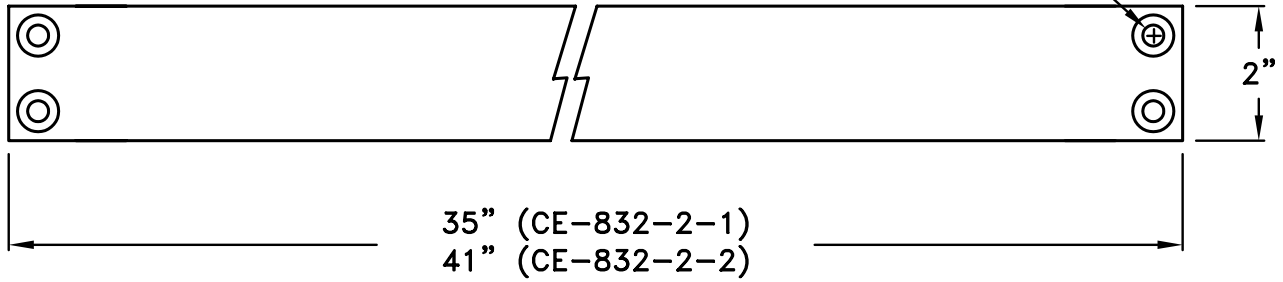

**WE RECOMMEND:**  
**CE-839 THREADED INSERTS**  
FOR SECURE INSTALLATION OF CART BARS.  
Stainless Steel Screws and/or bolts will be  
furnished at no charge when Threaded Inserts  
and Cart Bars are ordered together.



**WE RECOMMEND:**  
**the CE-839-T, EXPENDABLE TOOL**  
AN INSERT COMPRESSION TOOL IS REQUIRED FOR  
SETTING THREADED INSERTS.



- NOTES:
1. Do not scale drawing.
  2. All dimensions in inches unless noted otherwise.
  3. This drawing and information is the property of CURRAN ENGINEERING CO., INC. and is considered confidential. It may not be reproduced or copied without written permission of CURRAN ENGINEERING CO.

©2009 CURRAN ENGINEERING COMPANY, INC.

MATERIAL: 1/4" X 2" 304 STAINLESS STEEL			FINISH <b>SATIN</b>			WEIGHT Approx. 6 Lbs.		
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE			TITLE <b>CE-832-2 PUSH BAR</b>			CURRAN ENGINEERING COMPANY, INC. 28727 INDUSTRY DRIVE VALENCIA, CA 91355 TELEPHONE (800) 643-6353 FACSIMILE (877) 782-5979		
FRAC.	DEC.	ANG.						
± 1/16"	± 0.063 "	± 1/2 ·	DRAWN PSC DATE 01/23/02			SIZE	DRAWING NUMBER	ISSUE
SCALE NTS			NO. REQ. A/R			A	10228 CE-832-2	1
NEXT ASSY.			CHECKED RDC DATE 01/23/02					
			APPROVED RDC DATE 01/23/02					