


REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL

REQUESTS FOR CUSTOM DIMENSIONS AND MATERIALS ARE ALWAYS WELCOME



DRILL AND C'SINK
FOR 1/4" FLAT HEAD M.S.
(Typ 4)

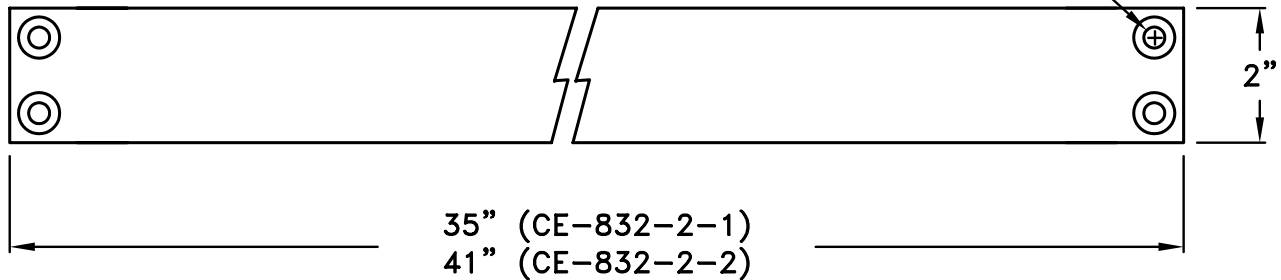

WE RECOMMEND:
CE-839 THREADED INSERTS
FOR SECURE INSTALLATION OF CART BARS.
Stainless Steel Screws and/or bolts will be
furnished at no charge when Threaded Inserts
and Cart Bars are ordered together.



WE RECOMMEND:
the CE-839-T, EXPENDABLE TOOL
AN INSERT COMPRESSION TOOL IS REQUIRED FOR
SETTING THREADED INSERTS.



NOTES:

1. Do not scale drawing.
2. All dimensions in inches unless noted otherwise.
3. This drawing and information is the property of CURRAN ENGINEERING CO., INC. and is considered confidential. It may not be reproduced or copied without written permission of CURRAN ENGINEERING CO.

©2009 CURRAN ENGINEERING COMPANY, INC.

MATERIAL: 1/4" X 2" 304 STAINLESS STEEL			FINISH SATIN			WEIGHT Approx. 6 Lbs.		
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE			TITLE CE-832-2 PUSH BAR			CURRAN ENGINEERING COMPANY, INC. 28727 INDUSTRY DRIVE VALENCIA, CA 91355 TELEPHONE (800) 643-6353 FACSIMILE (877) 782-5979		
FRAC.	DEC.	ANG.						
± 1/16"	± 0.063 "	± 1/2 °						
SCALE NTS		NO. REQ. A/R	DRAWN PSC DATE 01/23/02			SIZE	DRAWING NUMBER	ISSUE
NEXT			CHECKED RDC DATE 01/23/02			A	10228 CE-832-2	1
ASSY.			APPROVED RDC DATE 01/23/02					