


REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL



WE RECOMMEND:
CE-839 THREADED INSERTS
 FOR SECURE INSTALLATION OF CART BARS.
 Stainless Steel Screws and/or bolts will be
 furnished at no charge when Threaded Inserts
 and Cart Bars are ordered together.

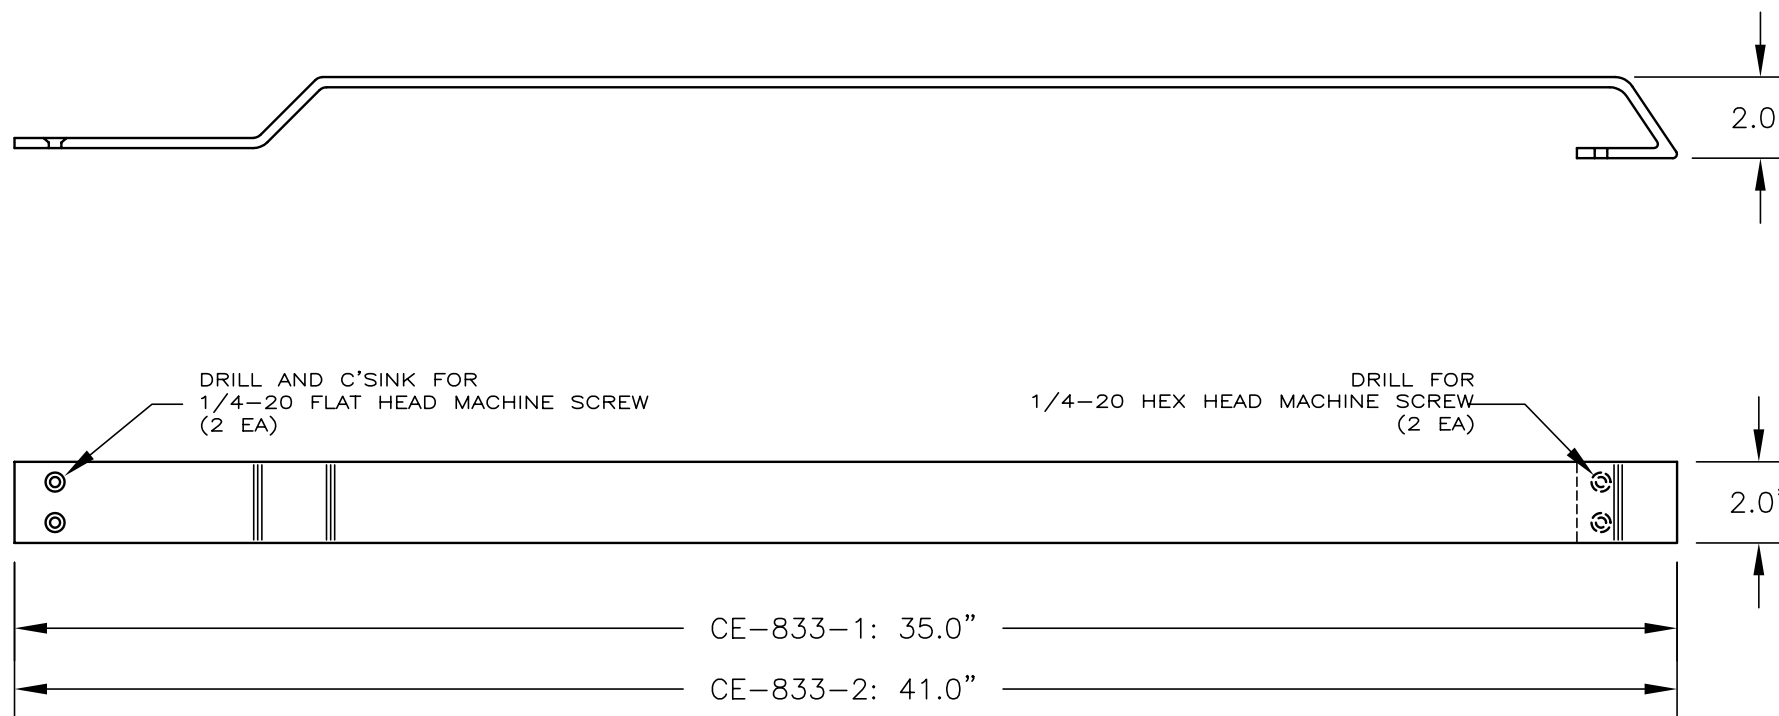

WE RECOMMEND:
the CE-839-T, EXPENDABLE TOOL
 AN INSERT COMPRESSION TOOL IS REQUIRED FOR
 SETTING THREADED INSERTS.



NOTES:
 1. Do not scale drawing.
 2. All dimensions in inches
 unless noted otherwise.
 3. This drawing and information is the property
 of CURRAN ENGINEERING CO., INC. and is considered
 confidential. It may not be reproduced or copied
 without written permission of CURRAN ENGINEERING CO.

MATERIAL: 1/4" X 2" STAINLESS STEEL			FINISH SATIN			WEIGHT A/R				
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE			TITLE CE-833 CART BAR – OFFSET			CURRAN ENGINEERING COMPANY, INC. 28727 INDUSTRY DRIVE VALENCIA, CA 91355 TELEPHONE (800) 643-6353 FACSIMILE (877) 782-5979				
FRAC.	DEC.	ANG.								
± 3/16"	± 0.187"	± 5								
SCALE NTS		NO. REQ.	A/R	DRAWN	PSC	DATE	9/18/01	SIZE	DRAWING NUMBER	ISSUE
NEXT ASSY.				CHECKED	PSC	DATE	9/18/01	A	20224	1
				APPROVED	RDC	DATE	9/28/01			