


REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL



WE RECOMMEND:
CE-839 THREADED INSERTS
 FOR SECURE INSTALLATION OF CART BARS.
 Stainless Steel Screws and/or bolts will be furnished at no charge when Threaded Inserts and Cart Bars are ordered together.

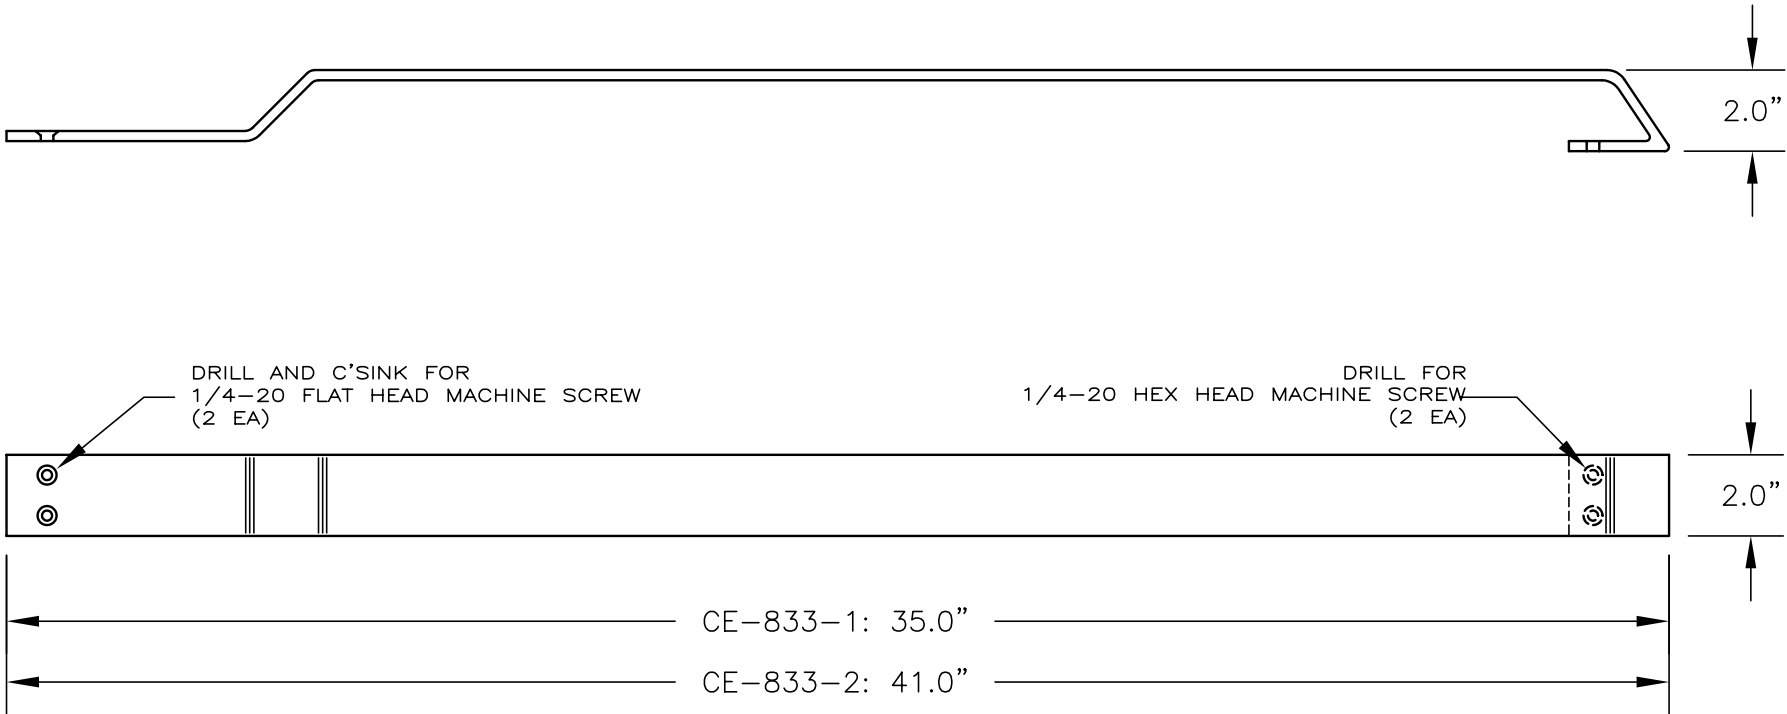

- NOTES:
1. Do not scale drawing.
 2. All dimensions in inches unless noted otherwise.
 3. This drawing and information is the property of CURRAN ENGINEERING CO., INC. and is considered confidential. It may not be reproduced or copied without written permission of CURRAN ENGINEERING CO.

WE RECOMMEND:
the CE-839-T, EXPENDABLE TOOL
 AN INSERT COMPRESSION TOOL IS REQUIRED FOR SETTING THREADED INSERTS.



MATERIAL: 1/4" X 2" STAINLESS STEEL			FINISH SATIN		WEIGHT A/R	
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE			TITLE CE-833			CURRAN ENGINEERING COMPANY, INC. 28727 INDUSTRY DRIVE VALENCIA, CA 91355 TELEPHONE (800) 643-6353 FACSIMILE (877) 782-5979
FRAC.	DEC.	ANG.	CART BAR - OFFSET			
± 3/16"	± 0.187"	± 5°	DRAWN PSC		DATE 9/18/01	SIZE A
SCALE NTS		NO. REQ. A/R	CHECKED PSC		DATE 9/18/01	DRAWING NUMBER 20224
NEXT ASSY.			APPROVED RDC		DATE 9/28/01	ISSUE 1