


REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL

REQUESTS FOR CUSTOM DIMENSIONS AND MATERIALS ARE ALWAYS WELCOME



**WE RECOMMEND:**  
**CE-839 THREADED INSERTS**  
FOR SECURE INSTALLATION OF CART BARS.  
Stainless Steel Screws and/or bolts will be  
furnished at no charge whey Threaded Inserts  
and Cart Bars are ordered together.

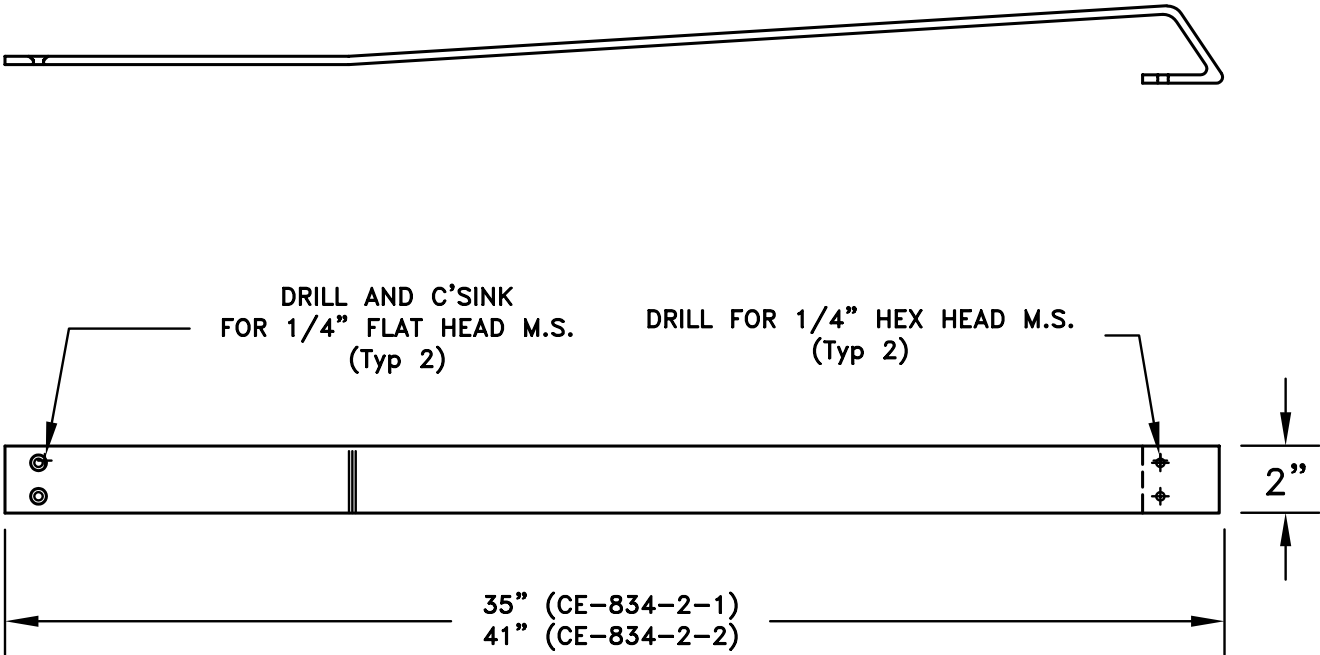

**WE RECOMMEND:**  
**the CE-839-T, EXPENDABLE TOOL**  
AN INSERT COMPRESSION TOOL IS REQUIRED FOR  
SETTING THREADED INSERTS.



- NOTES:
- 1. Do not scale drawing.
  - 2. All dimensions in inches unless noted otherwise.
  - 3. This drawing and information is the property of CURRAN ENGINEERING CO., INC. and is considered confidential. It may not be reproduced or copied without written permission of CURRAN ENGINEERING CO.

©2009 CURRAN ENGINEERING COMPANY, INC.

MATERIAL: 1/4" X 2" 304 STAINLESS STEEL			FINISH SATIN			WEIGHT Approx. 7 Lbs.		
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE			TITLE CE-834-2 CART BAR – SLOPED			CURRAN ENGINEERING COMPANY, INC. 28727 INDUSTRY DRIVE VALENCIA, CA 91355 TELEPHONE (800) 643-6353 FACSIMILE (877) 782-5979		
FRAC.	DEC.	ANG.						
± 1/16"	± 0.063 "	± 1/2 °						
SCALE NTS		NO. REQ. A/R	DRAWN PSC DATE 01/23/02			SIZE	DRAWING NUMBER	ISSUE
NEXT ASSY.			CHECKED RDC DATE 01/23/02			A	10229 CE-834-2	1
			APPROVED RDC DATE 01/23/02					