
PAULCTO FAR	ALICTAR BIRTCHARLANC	AND MATERIAL CARE	ALIMANO MELAARE
'FUUFSIS FUR	CUSTOM DIMENSIONS	anii wa ifriala arf	ALVVAYS VVELCUIVIE

	REVISIONS		
SYM.	DESCRIPTION	DATE	APPROVAL

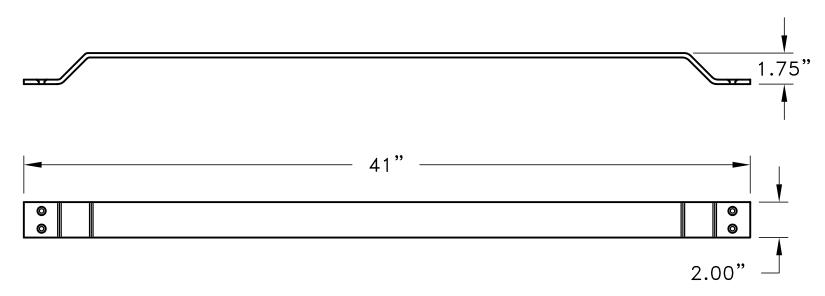

WE RECOMMEND:

CE-839 THREADED INSERTS

FOR SECURE INSTALLATION OF CART BARS. Stainless Steel Screws and/or bolts will be furnished at no charge whey Threaded Inserts and Cart Bars are ordered together.



WE RECOMMEND:

the CE-839-T, EXPENDABLE TOOL AN INSERT COMPRESSION TOOL IS REQUIRED FOR SETTING THREADED INSERTS.



NOTES:

- NOIES:

 1. Do not scale drawing.

 2. All dimensions in inches unless noted otherwise.

 3. This drawing and related information is the property of Curran Engineering Co., Inc. and is considered confidential. It may not be reproduced or copied without written permission of CURRAN ENGINEERING CO., INC. ©2009 CURRAN ENGINEERING COMPANY, INC.

MATERIAL: 1/4" X 2"		FINISH			WEIGHT					
304 STAINLESS STEEL			BRUSHED SATIN		6 LBS (2.72 Kg)					
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE				О Г	075)	CURRA	AN ENGINEERING COMPANY	, INC.	
FRAC.	DEC. ANG.			CE-835-2		28727 INDUSTRY DRIVE VALENCIA, CA 91355				
±1/4"	" ± 0.250 " ±1/2		±1/2 ·	CART			ELEPHONE (800) 643-635 FACSIMILE (877) 782-597			
SCALE NT:	٠	NO. REQ.	A/R	DRAWN	PSC	DATE	07/21/97	SIZE	DRAWING NUMBER	ISSUE
CUST.		I NEW.	-7/ N	CHECKED	RDC	DATE	07/21/97	>	10207	1
REF.		APPROVE	:D	DATE		А	CE-835-2	l		