
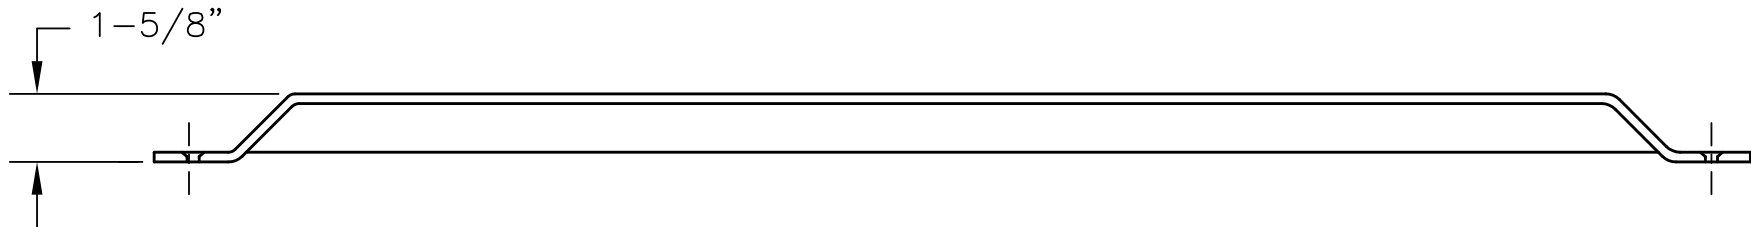


REQUESTS FOR CUSTOM DIMENSIONS AND MATERIALS ARE ALWAYS WELCOME

REVISIONS

SYM.	DESCRIPTION	DATE	APPROVAL
	FIRST PRODUCTION	8/22/97	RDC

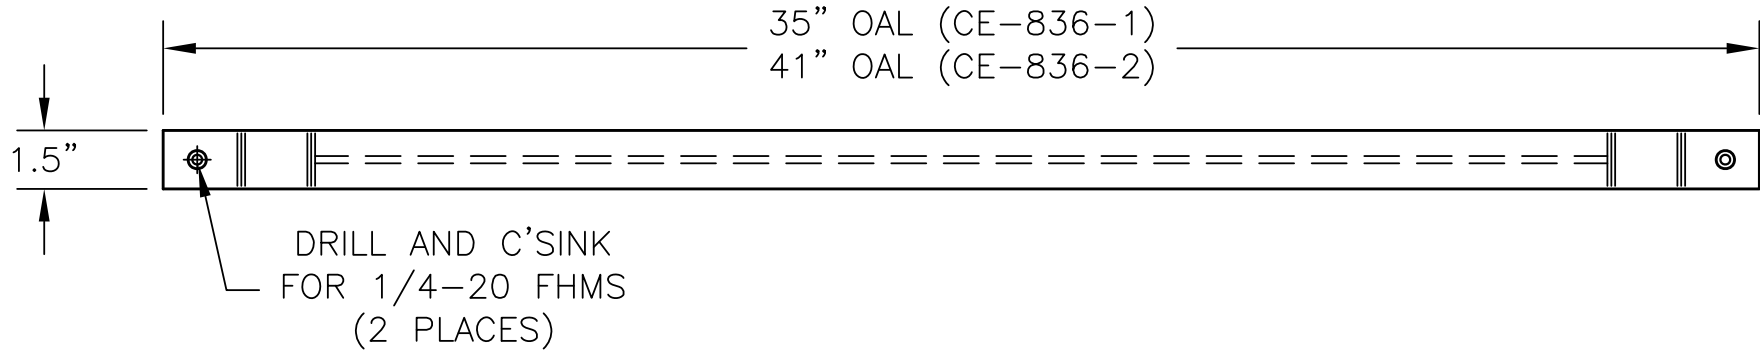

WE RECOMMEND:
CE-839 THREADED INSERTS
FOR SECURE INSTALLATION OF CART BARS.
Stainless Steel Screws and/or bolts will be furnished at no charge when Threaded Inserts and Cart Bars are ordered together.



- NOTES:
1. Do not scale drawing.
 2. All dimensions in inches unless noted otherwise.
 3. This drawing and information is the property of CURRAN ENGINEERING CO., INC. and is considered confidential. It may not be reproduced or copied without written permission of CURRAN ENGINEERING CO.

WE RECOMMEND:
the CE-839-T, EXPENDABLE TOOL
FOR SETTING THREADED INSERTS.



MATERIAL: 3/16" X 1-1/2" 304 STAINLESS STEEL			FINISH SATIN			WEIGHT Approx. 9 Lbs.					
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE			TITLE CE-836 CART BAR - REINFORCED			CURRAN ENGINEERING COMPANY, INC. 28727 INDUSTRY DRIVE VALENCIA, CA 91355 TELEPHONE (800) 643-6353 FACSIMILE (877) 782-5979					
FRAC.	DEC.	ANG.	SCALE	NO. REQ.	A/R	DRAWN	PSC	DATE	SIZE	DRAWING NUMBER	ISSUE
± 3/16"	± 0.187"	± 5°	NTS			CHECKED	PSC	DATE	A	CE-836	1
NEXT ASSY.			APPROVED			RDC		DATE	7/22/97		