



## CE-910 GUIDE POST FOR CORE INSTALLATION

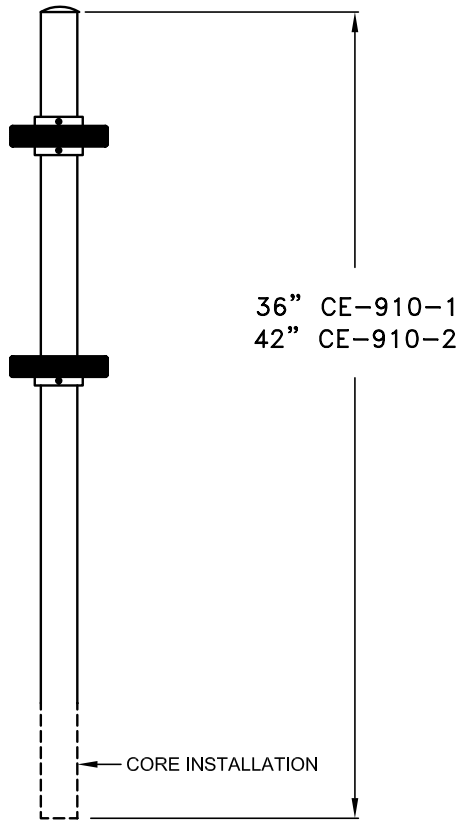

## CE-911 GUIDE POST FOR SURFACE INSTALLATION

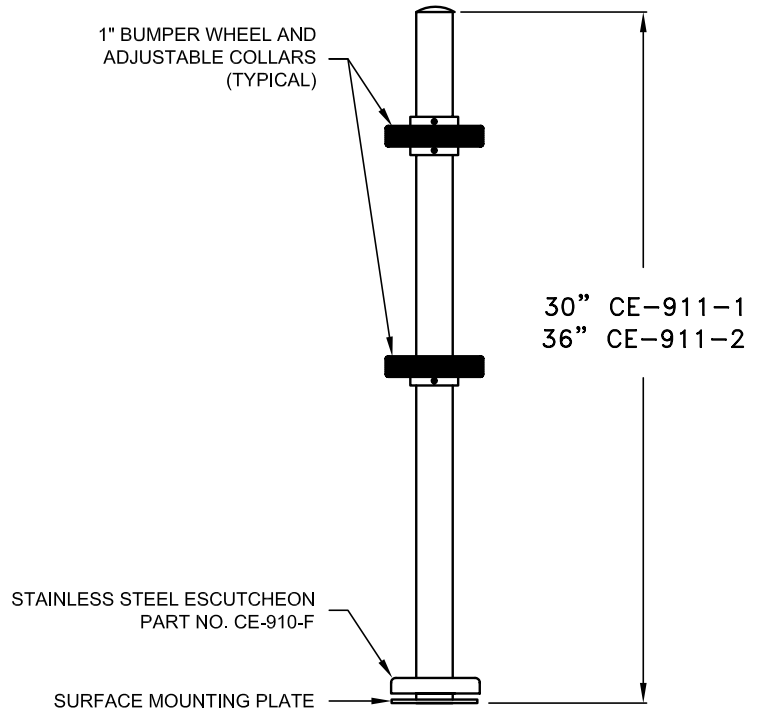

### RECESSED MOUNTING INSTALLATION INSTRUCTIONS

Set post in Non-Shink Epoxy or Grout according to manufacturers instructions. Grout must meet or exceed ASTM C 1107.

### SURFACE MOUNTING INSTALLATION INSTRUCTIONS

Use 4 ea.  $\frac{3}{8}$ " expansion anchors and  $\frac{3}{8}$ " bolts designed for secure installation into the existing substrate.

### OPTIONS:

Satin, Mirror or Powder Coat Finish, Solid Steel Insert, Custom Sizes,  
1" or 4" High Bumpers, Recessed Boot for Removable CE-910

©2008 – This drawing and information is the property of Curran Engineering Co., Inc. and is considered confidential. It may not be reproduced or copied without written permission of CURRAN ENGINEERING CO., INC.

MATERIAL: <b>1-7/8" STAINLESS STEEL WITH REINFORCING INNER SLEEVE</b>			FINISH: <b>MIRROR OR SATIN POLISH</b>		SIZE: <b>PER DETAIL</b>		
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE			<b>GUIDE POSTS with BUMPERS</b>		CURRAN ENGINEERING COMPANY, INC. 28727 INDUSTRY DRIVE VALENCIA, CA 91355 TELEPHONE (800) 643-6353 FAX (877) 782-5979		
FRAC.	DEC.	ANG.					
<b>±1/32"</b>	<b>±0.031"</b>	<b>± 1 °</b>					
SCALE <b>NONE</b>	NO. REQ. <b>A/R</b>		DRAWN: <b>PSC</b>	DATE <b>12/01/00</b>	SIZE	DRAWING NUMBER	ISSUE
NEXT ASSY.			CHECKED: <b>RDC</b>	DATE <b>12/01/00</b>	<b>A</b>	<b>10150 CE-910 &amp; CE-911</b>	<b>2</b>
			APPROVED: <b>RDC</b>	DATE <b>12/01/00</b>			