


REQUESTS FOR CUSTOM DIMENSIONS AND MATERIALS ARE ALWAYS WELCOME

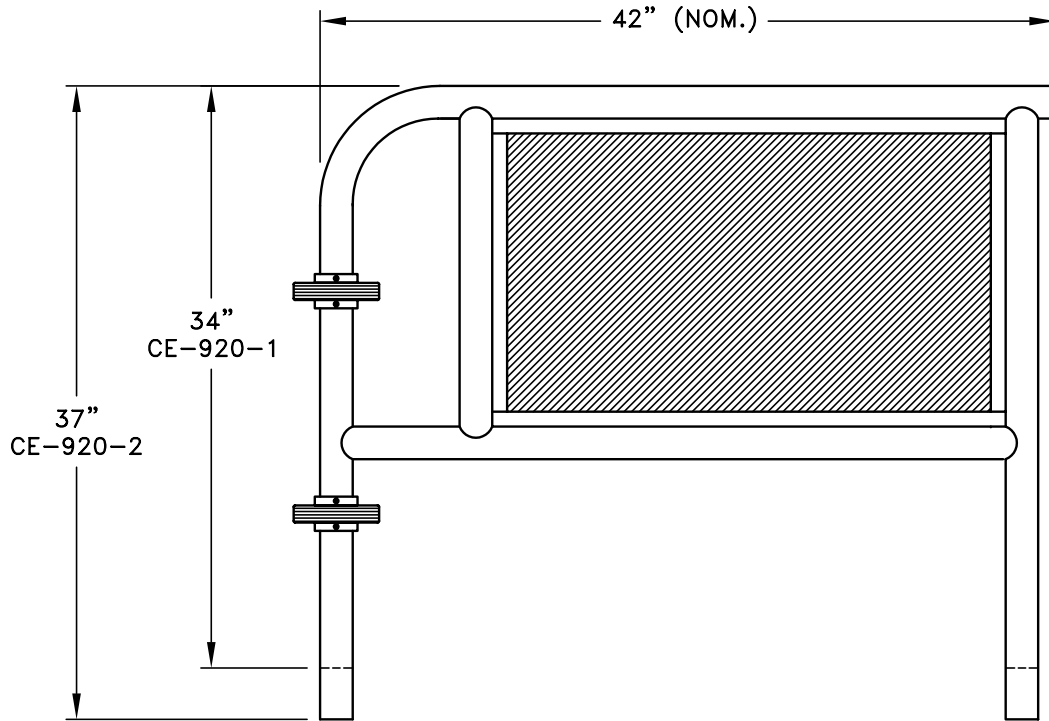

GENERAL DESIGN SPECIFICATIONS

RAILING

304 ALLOY STAINLESS STEEL OUTER TUBE
WITH CARBON STEEL STRUCTURAL INNER TUBE
CONTINUOUS WELDS, POLISHED AND BLENDED
6" CENTERLINE RADIUS

FINISH

MIRROR POLISH OR SATIN GRAIN

PANEL

1/4" KYDEX WITH HAIRCELL SURFACE BOTH SIDES.

BUMPER WHEEL

5" O.D. X 1" HIGH BLACK MOLDED, ADJUSTABLE

MOUNTING

CORE DRILL AND INSTALL WITH NON-SHRINK EPOXY GROUT
PART NUMBER SUFFIX '-F' FOR SURFACE MOUNTING.
WELDED PLATES WILL BE ADDED TO LEGS FOR INSTALLATION
WITH EXPANSION BOLTS



OPTION '-EA'
ENGRAVED ARROW PANEL

This drawing and information is the property of Curran Engineering Co., Inc. and is considered confidential. It may not be reproduced or copied without written permission of CURRAN ENGINEERING CO., INC.

©2007 — CURRAN ENGINEERING CO., INC.

MATERIAL: 1-7/8"Ø ST. STEEL			FINISH: PER SPECIFICATION		WEIGHT: 36 LBS. Approx.		
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE			TITLE CE-920 STAINLESS STEEL TUBULAR GUIDE RAIL		CURRAN ENGINEERING COMPANY, INC. 28727 INDUSTRY DRIVE VALENCIA, CA 91355 TELEPHONE (800) 643-6353 FACSIMILE (877) 782-5979		
FRAC.	DEC.	ANG.					
±1/8"	± 0.125"	± 1 °					
SCALE NTS		NO. REQ. 1	DRAWN: PSC DATE 02/12/2007		SIZE	DRAWING NUMBER	ISSUE
NEXT ASSY.			CHECKED: DMC DATE 02/15/2007		A	10162 CE-920	1
			APPROVED: PSC DATE 02/15/2007				